


PIN ASSIGNMENT

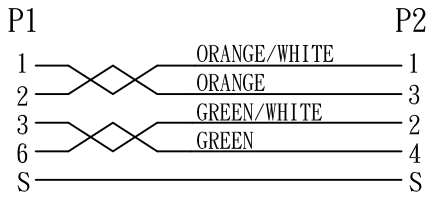

- NOTES:
- PIN ASSIGNMENT SEE TO WIRE LIST.
  - ELECTRICAL TEST CONDITION:
    - 100%OPEN, SHORT & MISWIRE TEST,
    - INSULATOR RESISTANCE:5Mohm MIN.  
DC 300V 0.01sec.
    - CONTACT RESISTANCE:5ohm MAX.
  - RoHS COMPLIANCE.

Swift PN 00346-01 rev04

4	G0001	Mold	ALL CONNECTORS OVERMOLD BLACK PVC
3	A0162	Conn	RJ45-8P8C plug shielded CAT5E 50u" GOLD PLATED
2	A0663	Conn	M12 4P D-CODE MALE BLACK INSULATOR SOLDER TYPE
1	E0594	Cable	CAT5E STP 24AWG/2P OD:5.3mm BLACK PVC
No	Part No	Title	Description

UNLESS OTHERWISE SPECIFIED TOLERANCE		ARCHTECH ELECTRONICS CORP.	
ANG.	±		
0.	±		
.0	±		
.00	±		
SCALE:	NONE	UNIT: mm	CUSTOMER P/N.: 90-M12D4M/R8-08
DRAWN:		05/26/'17	DRAWN NAME:
CHECKED:	/ /		M12 D-CODE 4P MALE ETHERNET CABLE AL=2.5M
APPROVED:	/ /		PRODUCT NO: AA8552617
			FILE NAME: 90-M12D4M/R8-08

△			△		
△			△		
△			△		
REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE
1			4		
2			5		
3			6		
7			7		
8			8		
9			9		
10			10		